

Hydroguard




A SIKA COMPANY

GENERAL DESCRIPTION

Hydroguard consists of extruded polystyrene foam insulation topped with a 3/8 in. or 15/16 in. latex modified concrete. Hydroguard is manufactured in 2 ft. X 4 ft. panels that weigh 4.5 lb./sq.ft. (standard) or 11.0 lb./sq.ft. (heavy) and has tongue and groove edges along the long sides of the panels.

BASIC USE

Hydroguard is ideally suited to provide both insulation and lightweight ballasting to a roof system. Hydroguard, installed above the roof membrane (IRMA/PMR), also provides protection to the membrane from mechanical abuse and environmental extremes. Hydroguard must be installed in strict accordance with Hydrotech's installation guidelines.

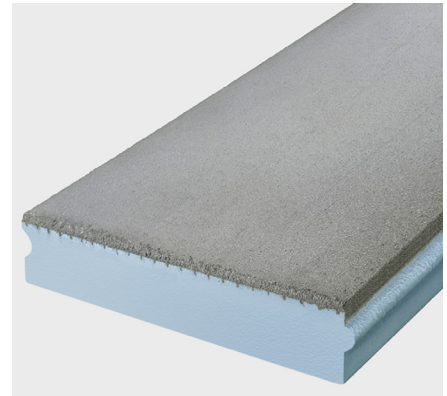

LIMITATIONS

- Hydroguard is designed to accept light foot traffic. Walkway pads or concrete pavers must be provided where continuous or excessive foot traffic is anticipated.
- Hydroguard is intended for Range 1 securement installations only.
- Hydroguard should be shielded from direct sunlight when stored outdoors for extended periods of time.

TECHNICAL DATA

PROPERTY	TEST METHOD	RESULTS
THICKNESS (in.) foam		2 or 3
THICKNESS (in.) concrete topping		3/8 std.; 15/16 heavy
THERMAL RESISTANCE (R/in.)	ASTM D751-66	5.0 @ 75°F 5.4 @ 40°F
WATER ABSORPTION (% by volume, max.)	ASTM C272	0.3
WATER VAPOR PERMEANCE (perm, max.)	ASTM E96	0.8
COMPRESSIVE STRENGTH (foam, lb./sq.in.)	ASTM D1621-79	40
POINT LOADING (1 in. x 1 in., lb./sq.in.)		450

LEED INFORMATION

	Credit 4	Credit 5
Recycled Content (% by weight)	2.2 (pi)	
Manufacture Location		Hamilton, OH
Extraction/Harvesting Location		Contact American Hydrotech for info
VOC Content (g/L)		0

This information is intended only for general conceptual purposes. It is based on data and knowledge considered to be true and correct. It is offered for the user's consideration, investigation and verification and is not intended to substitute for the advice provided by appropriate professionals. Hydrotech assumes no liability for the use of this information. The determination of the suitability and applicability of this information is the sole responsibility of the user.