

Hanover Pavers



A SIKA COMPANY

GENERAL DESCRIPTION


Hanover Pavers, as marketed by American Hydrotech, Inc. are high density, hydraulically pressed, architecturally finished, concrete pavers.

BASIC USE

Hanover Pavers are designed to be used as roof ballast for IRMA roof assemblies or decorative plaza/terrace pavers, in conjunction with Hydrotech’s Monolithic Membrane 6125® rubberized asphalt membrane.

SIZES

Standard sizes for Hanover Pavers are nominal 12, 18, 24, 30 and 36 inches square and thicknesses of 2 – 4 inches. “Plank-style” size pavers, nominal 6 X 18, 24, and 36 inches as well as oversized pavers, nominal 24 X 30, 36, and 48 inches, are also available. Pavers weigh approximately 12.5 pounds per square foot per inch thickness.

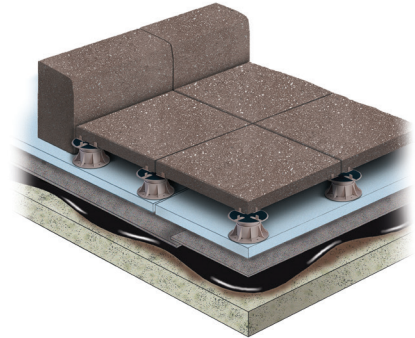

TECHNICAL DATA (For all paver types)

PROPERTY	TEST METHOD	RESULTS
COMPRESSIVE STRENGTH (lb./sq.in., avg.)	ASTM C140	8,500
FLEXURAL STRENGTH (lb.sq.in.)	ASTM C140	1,100
WATER ABSORPTION (%)	ASTM C140	< 4
FREEZE RESISTANCE (<500 g/m ² mass loss)	ASTM C1645	Pass
SOLAR REFLECTANCE INDEX (SRI)†	ASTM E1980	> 78 ‡

† For Credit 7.2 Heat Island Effect, L.E.E.D. version 2.2 requires an SRI of greater than 78

‡ For Glacier White pavers ONLY – Finish 13 SRI = 81; Ground Finish SRI = 72; Tudor Finish SRI = 85; Diamond Finish SRI = 84

LEED® INFORMATION

	Credit 4	Credit 5
Recycled Content (% by weight)	7 pi	
Manufacture Location		Hanover, PA
Extraction/Harvesting Location		Hanover, PA
VOC Content (g/L)		0

This information is intended only for general conceptual purposes. It is based on data and knowledge considered to be true and correct. It is offered for the user’s consideration, investigation and verification and is not intended to substitute for the advice provided by appropriate professionals. Hydrotech assumes no liability for the use of this information. The determination of the suitability and applicability of this information is the sole responsibility of the user.