


Hydrodrain[®] 302



A SIKA COMPANY

GENERAL DESCRIPTION

Hydrodrain 302 is a composite drainage system of a three-dimensional, crush-proof drainage core and a white non-woven, needle punched filter fabric. The filter fabric is bonded to the ridges of the core, preventing intrusion of the fabric into the flow channels during backfilling. The fabric extends 4" beyond the core along one short and one long side of the roll, and a layer is bonded on both sides of the core.

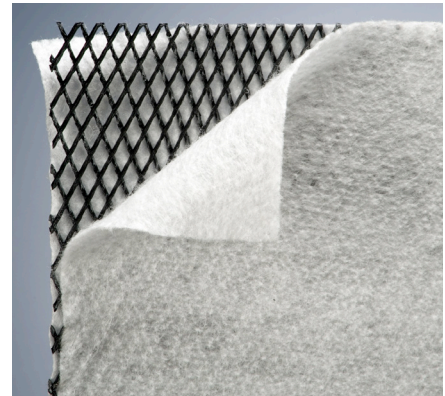

BASIC USE

The Hydrodrain drainage layer is ideal anywhere a subsurface drainage course is required. Typical applications include foundation walls, trench drains, planters, plaza decks and roof assemblies. Hydrodrain must be covered with subsequent overburden within 10-14 days of installation.

ADVANTAGES

- Reduces hydrostatic pressure on below-grade structures.
- Enhances conventional waterproofing systems by transmitting water into a collection system before it reaches the wall substrate.
- Prevents intrusions of soil, concrete, or grout into the flow channels.
- Materials are resistant to all known naturally occurring earth salts and minerals.

SIZES

The Hydrodrain drainage layer is available in roll form, 48 inches wide by 75 feet long. The geotextile overlaps the drainage core 4 inches on one side. Each roll covers 300 square feet and weighs 80 lb.

TECHNICAL DATA

PROPERTY	TEST METHOD	GEOTEXTILE	RESULTS
THICKNESS	ASTM D1777	--	0.25 in.
COMPRESSIVE STRENGTH	ASTM D1621	--	40,000 psf
FLOW "Q" @ 3600 psf; Hydraulic Gradient = 1	ASTM D4716	--	8.5 gal. / min. / ft. width
FLOW	ASTM D4491	150 gal. / min. / ft. ²	--
PUNCTURE	ASTM D4833	55 lb.	--
U.V. RESISTANCE	ASTM D4355	70% @ 500 hours	--
GRAB TENSILE	ASTM D4632	95 lb.	--
APPARENT OPENING SIZE	ASTM D4751	70 mm U.S. Std. Sieve	--

The property values listed above are typical values and subject to change without notice.

Note: As of June 1, 2010, all geonet-type Hydrodrains (300, 302, 1000, AL) will be produced with a white filter fabric bonded to the top side of the core.

LEED® INFORMATION

	Credit 4	Credit 5
Recycled Content (% by weight)	100 (pc)	
Manufacture Location		Alpharetta, GA
Extraction/Harvesting Location		Alpharetta, GA
VOC Content (g/L)		0

This information is intended only for general conceptual purposes. It is based on data and knowledge considered to be true and correct. It is offered for the user's consideration, investigation and verification and is not intended to substitute for the advice provided by appropriate professionals. Hydrotech assumes no liability for the use of this information. The determination of the suitability and applicability of this information is the sole responsibility of the user.